
VHIREGW350TH



Glass Worker 350kg Glazing Robot For Forks

The Glass Worker 350kg Glazing Robot For Forks is designed to fit on most telehandlers providing an excellent solution where height or ground conditions prevent the use of a standard Mini Crane.



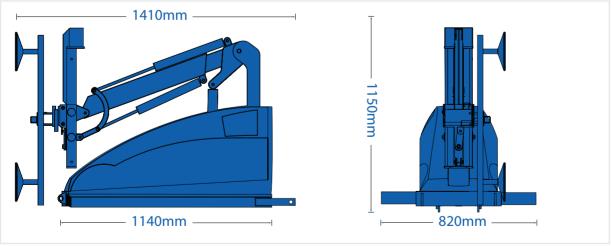

Page 1

Republic of Ireland (Head Office)

Phone:0505 45125Fax:0505 45345Web:www.glassparts.ieEmail:sales@glassparts.ieAddress:Lisbunny Industrial Estate, Lisbunny, Nenagh, Co. Tipperary.

United Kingdom (Sales Office)

Phone:0800 975 3436Fax:00 353 505 45345Web:www.glassparts.co.ukEmail:sales@glassparts.co.ukAddress:Unit 6, The Glenmore Centre, Cable St, Southampton SO145AE

VHIREGW350TH



Glass Worker 350kg Glazing Robot For Forks



The Glass Worker 350kg Glazing Robot For Forks is available as standard with fork pockets which are appropriate for all machines or with Quick Shift for Telehandler.

In addition, the Glass Worker 350kg Glazing Robot For Forks have a hydraulic system which makes it independent from the Telehandler.



The Glass Worker 350kg Glazing Robot For Forks has no less than 350 kg lifting capacity and has a 2-circuit vacuum system which provides great security.

The impressive 500 m telescopic feature allows mounting of elements in places where other machines give up.



Multifunction control panel in operator friendly design with integrated buttons.

Signal lights and Double action safety keys are both in the standard setup on the 350TH.

Page 2

Republic of Ireland (Head Office)

Phone:0505 45125Fax:0505 45345Web:www.glassparts.ieEmail:sales@glassparts.ieAddress:Lisbunny Industrial Estate, Lisbunny, Nenagh, Co. Tipperary.

United Kingdom (Sales Office)

Phone: 0800 975 3436 Fax: 00 353 505 45345

Web: www.glassparts.co.uk Email: sales@glassparts.co.uk


Address: Unit 6, The Glenmore Centre, Cable St, Southampton SO145AE

VHIREGW350TH



Glass Worker 350kg Glazing Robot For Forks

Reach 2 250kg 350kg 200kg 300kg

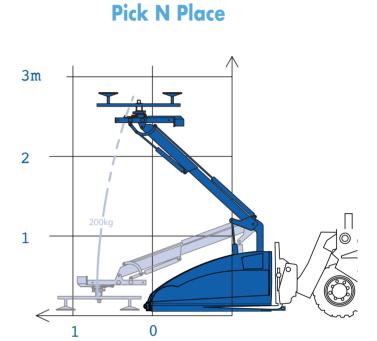

TECHNICAL DATA	
Max capacity	350 kg
Max capacity on side	200 kg
Total weight	400kg
External width	820mm
External length	1410mm
External height	1150mm
Min/max extension (front bumper to suction cup)	290/790mm
Max lifting height (to centre of lifting yoke)	2700mm
Side offset	100mm
Fine lift on arm	500mm
Tilt function	180°
Continuous rotation	360°
Suction cups	4 x Ø 270mm
Battery	2 x95 AH

Page 3

Phone:0505 45125Fax:0505 45345Web:www.glassparts.ieEmail:sales@glassparts.ieAddress:Lisbunny Industrial Estate, Lisbunny, Nenagh, Co. Tipperary.

United Kingdom (Sales Office)

Phone:0800 975 3436Fax:00 353 505 45345Web:www.glassparts.co.ukEmail:sales@glassparts.co.ukAddress:Unit 6, The Glenmore Centre, Cable St, Southampton SO145AE