


## Vitrine Alum. Sliding Track Wheel Insert Tool ( Model: GST013 )

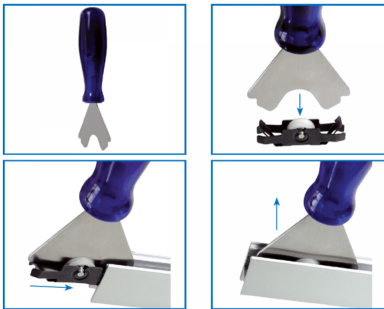

- Glass thickness: 5-6mm.

- Use of 2 roller bearings 25kg; 4 roller bearings = 50kg.


- Upper double - guide, not drilled, with grass flock.

### Attributes:

**Product Code:** GST013

**Unit Of Sale:** Each

W = Inside width of frame  
 GW = Glass width  
 H = Inside height of frame  
 GH = Glass height



With frame and high bottom rail (like on picture):

$$GW = (W - 250 \text{ mm}) + 50 \text{ mm} \times 0.5$$

↓  
 OVERLAY  
 ↓  
 BUMPER  
 ↓  
 With bumpers at the sides deduct 10 mm from the GW result.

$$GH = H - 40 \text{ mm}$$

↓  
 PROFILE + AIR

Without frame and with low bottom rail:

$$GW = (W - 20 \text{ mm}) \times 0.5$$

↓  
 OVERLAY  
 ↓  
 With bumpers at the sides deduct 10 mm from the GW result.

$$GH = H - 32 \text{ mm}$$

↓  
 PROFILE + AIR

