


60mm Dia. Flat Head Articulated Bolt For 15 - 22mm Thick Gla (Model: KSP.R1003-1522-1465)

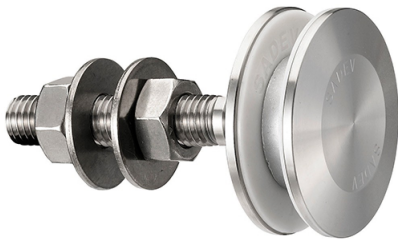


Attributes:

Product Code: KSP.R1003-1522-1465



Unit Of Sale: Each

Components




MARK	QUANTITY	DESIGNATION	MATERIAL
1	1	Screw body	X2 Cr Ni Mo 17.12.2 as per EN 10088-3
2	1	Thimble/ Side	X2 Cr Ni Mo 18.5.1 as per EN 10088-3
3	1	Glass hole grommet	AW-1000A as per EN 573-3/A1 99.5%
4	2	Contact washer	White polyacetal/white polyethylene
5	1	Clamp nut 3025	X2 Cr Ni Mo 17.12.2 as per EN 10088-3
6	1	Nut DIN 934	A4
7	2	Washer	A4
8	1	Lock washer DIN127	A4
9	1	Nut DIN 934	A4
10	1	3025 Cap nut - Option	X2 Cr Ni Mo 17.12.2 as per EN 10088-3
11	1	Mored cap nut - Option	X2 Cr Ni Mo 17.12.2 as per EN 10088-3

Glass Drilling



Available for glass thicknesses from 8 to 31.52 mm, for other thicknesses glass consult us.
It is important to provide the following information with each request: the glass composition (e.g. 10 mm monolithic, 8.8.4 laminated, 8.8.2.12.10 insulating) / the length and diameter of the threaded axle if not standard dimensions (M14, 60 mm) / the reference of the spider to be used as support, or the thickness of an existing support for the delivery of the spacers.

Mechanical Performance



Dimensions

