


## Flat Head UV Articulated Bolt For Variable Thickness Glass ( Model: KSP.R1003A-V-1465 )

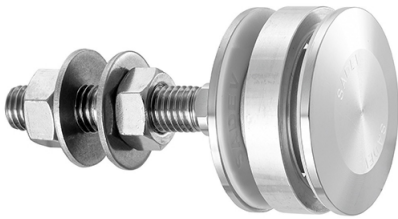


**Attributes:**


**Product Code:** KSP.R1003A-V-1465

**Unit Of Sale:** Each

**Dimensions**

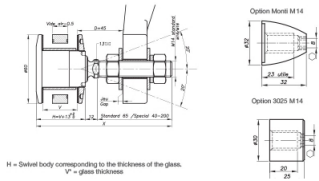


**Components**

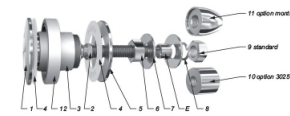

MARK	QUANTITY	DESCRIPTION	REFERENCE
1	1	Selected body	XZ D14 Mx 17 12.2 as per EN 10088-3
2	1	Flattened Nut	XZ D14 Mx 16.5 1 as per EN 10088-3
3	1	Glass hole grommet	AW 1000 as per EN 573-3/4/5/6/7/8
4	2	Contact washer	White polyethylene or polyethylene
5	1	Clamp nut 3025	XZ D14 Mx 17 12.2 as per EN 10088-3
6	1	Flat DIN 934	A4
7	2	Washer	A4
8	1	Lock washer DIN 927	A4
9	1	Flat DIN 934	A4
10	1	3025 Cap Nut - Option	XZ D14 Mx 17 12.2 as per EN 10088-3
11	1	Mount cap nut - Option	XZ D14 Mx 17 12.2 as per EN 10088-3
12	1	Sealing ring	ACUMAP212017A (A4/A5) as per EN 573-3

**How to Use**



It is required to verify the following information with each supplier and/or manufacturer (i.e., 15 mm maximum, 0.8 & maximum, 0.8 & 10.0) to ensure the depth and diameter of the threaded hole is not affected dimensionally. The tolerance of the depth is to be used to respect the thickness of the sealing support to the depth of the hole.

**Method of Performance**

