

60mm Dia. Flat Head Fixed Bolt For 22 - 26mm Thick Glass (Model: KSP.V2003-2226-1465)




- Fixed bolt with a 60mm diameter flat head for use in spider glazing systems.
- Suitable for glazing from the outside or blind access glazing.
- Manufactured using 316 grade stainless steel.
- Standard 65mm long axis and suitable for 22 - 26mm thick glass.
- Please see the other bolts in the range for additional glass thicknesses. Special dimension glass bolts available on request.
- Glassparts recommend using thread locking compound whenever possible.

Attributes:

Product Code: KSP.V2003-2226-1465

Unit Of Sale: Each

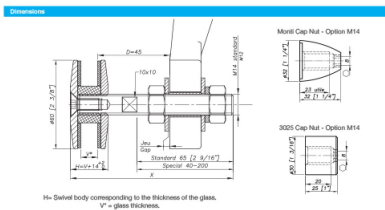

Components

MARK	QUANTITY	DESIGNATION	MATERIAL
1	1	External plate	316 Cr Ni Mo 17.12.2 as per EN 10088-3
2	1	Threaded plate	Alu
3	1	Spacer O 25	Platinum
4	2	Contact washer	ETFE
5	1	Glass Nut O 50	316 Cr Ni Mo 17.12.2 as per EN 10088-3
6	1	Nut EN 504	Alu
7	2	Washer	Alu
8	1	Lockwasher 127	Alu
9	1	Bolt DIN7981 M6x20	Alu
10	1	Nut EN 504	Alu
11	1	3025 Cap Nut - Option	316 Cr Ni Mo 17.12.2 as per EN 10088-3
12	1	M14 Cap Nut - Option	316 Cr Ni Mo 17.12.2 as per EN 10088-3

How to Use

Monolithic glass

Laminated glass

V = 1/2 glass + intercalated film + 1/2 glass

Available for glass thickness from 6 to 32 mm, for other thicknesses please contact us.
 It is required to provide the following information when you request: the glass composition (tempered, heat-treated, heat-treated and heat-treated), the glass thickness (mm), the number of the glass (1 or 2), the thickness of the spacer (mm), the thickness of the spacer to be used as support, the thickness of the sealing material for the durability of the spacer.

Method of Performance

Force (kN)	Displacement (mm)	Stiffness (kN/mm)
0	0	0
10	1.5	6.67
20	3.0	6.67
30	4.5	6.67
40	6.0	6.67
50	7.5	6.67
60	9.0	6.67
70	10.5	6.67
80	12.0	6.67
90	13.5	6.67
100	15.0	6.67