


## 60mm Dia. Flat Head Fixed Bolt For 15 - 22mm Thick Glass ( Model: KSP.V2005-1522-1266 )

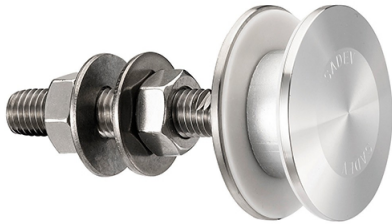


- Fixed bolt with a 60mm diameter flat head for use in spider glazing systems.
- Manufactured using 316 grade stainless steel.
- Standard 65mm long axis and suitable for 15 - 22mm thick glass.
- Please see the other bolts in the range for additional glass thicknesses.
- Special dimension glass bolts available on request.
- Glassparts recommend using thread locking compound whenever possible.

**Attributes:**

**Product Code:** KSP.V2005-1522-1266

**Unit Of Sale:** Each

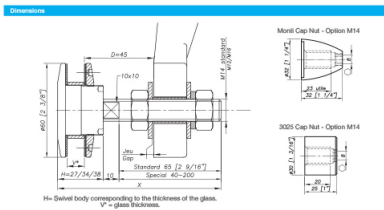

**Components**

| MARK | QUANTITY | DESIGNATION           | MATERIAL                               |
|------|----------|-----------------------|--|
| 1    | 1        | Body                  | 316 Cr Ni Mo 17.12.2 as per EN 10088-3 |
| 2    | 1        | Threaded sleeve       | A4                                     |
| 3    | 1        | Glass hole grommet    | AW 1005A as per EN 1733-3 / AW 100-5   |
| 4    | 2        | Contact washer        | W460 copper/Al or Cu/Al                |
| 5    | 1        | Glass hole O.D        | 316 Cr Ni Mo 17.12.2 as per EN 10088-3 |
| 6    | 1        | Flat DIN 504          | A4                                     |
| 7    | 2        | Washer                | A4                                     |
| 8    | 1        | Lockwasher 127        | A4                                     |
| 9    | 1        | Flat DIN 504          | A4                                     |
| 10   | 1        | 3025 Cap Nut - Option | 316 Cr Ni Mo 17.12.2 as per EN 10088-3 |
| 11   | 1        | M16 Cr Nut - Option   | 316 Cr Ni Mo 17.12.2 as per EN 10088-3 |

