

HD Bottom Hydraulic Patch Fitting For 10-15mm Thick Glass (Model: KGT10SS-AUTO135)



- Bottom patch fitting with concealed spring for door closing. With this fitting there is now no need to dig out for traditional floor spring boxes especially in areas where underground services may be present such as underfloor heating. These are ideal for offices, internal doors or external doors that may be sheltered from extreme wind.

- Specifications: Compliant with EN 1154



- Quick and easy installation. Suitable door weight: Max 100kg. Suitable door width: 750-1250mm. Suitable door thickness: 10-15mm.

- Easy installation with base seat adjustable:
 - +3mm backward and forward
 - +3mm left and right and 4° alignment adjustment.

Finish: SSS

- Quick & easy installation with smooth movement. No need to have the pre-set on the floor

- Easy installation with base seat adjustable
 - $\hat{A}\pm 3\text{mm}$ backward and forward
 - $\hat{A}\pm 3\text{mm}$ left and right and
 - 4° alignment adjustment

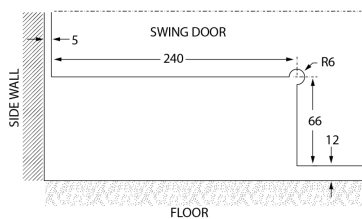

Attributes:

Product Code: KGT10SS-AUTO135

Unit Of Sale: Each