60mm Dia. Flat Head Fixed Bolt For 6 - 22mm Thick Glass (Model: KSP.V2003-0622-1465)

- Fixed bolt with a 60mm diameter flat head for use in spider glazing systems.
- Suitable for glazing from the outside or blind access glazing.
- Manufactured using 316 grade stainless steel.
- Standard 65mm long axis and suitable for 8 - 15mm thick glass.
- Please see the other bolts in the range for additional glass thicknesses.
- Special dimension glass bolts available on request.
- Glassparts recommend using thread locking compound whenever possible.

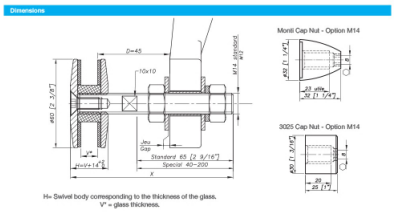

Attributes:

Product Code: KSP.V2003-0622-1465

Unit Of Sale: Each

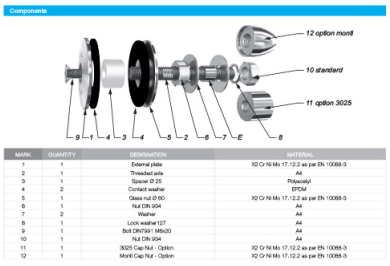

MARK	QUANTITY	DESIGNATION	MATERIAL
1	1	External plate	X2 Cr Ni Mo 17.12.2 as per EN 10088-3
2	1	Threaded axle	A4
3	1	Spacer Ø 25	Polyacetyl
4	2	Contact washer	EPDM
5	1	Glass nut Ø 60	X2 Cr Ni Mo 17.12.2 as per EN 10088-3
6	1	Nut DIN 934	A4
7	2	Washer	A4
8	1	Lock washer127	A4
9	1	Bolt DIN7991 M8x20	A4
10	1	Nut DIN 934	A4
11	1	3025 Cap Nut - Option	X2 Cr Ni Mo 17.12.2 as per EN 10088-3
12	1	Monti Cap Nut - Option	X2 Cr Ni Mo 17.12.2 as per EN 10088-3